REVISIONS			
REV	DESCRIPTION	DATE	BY

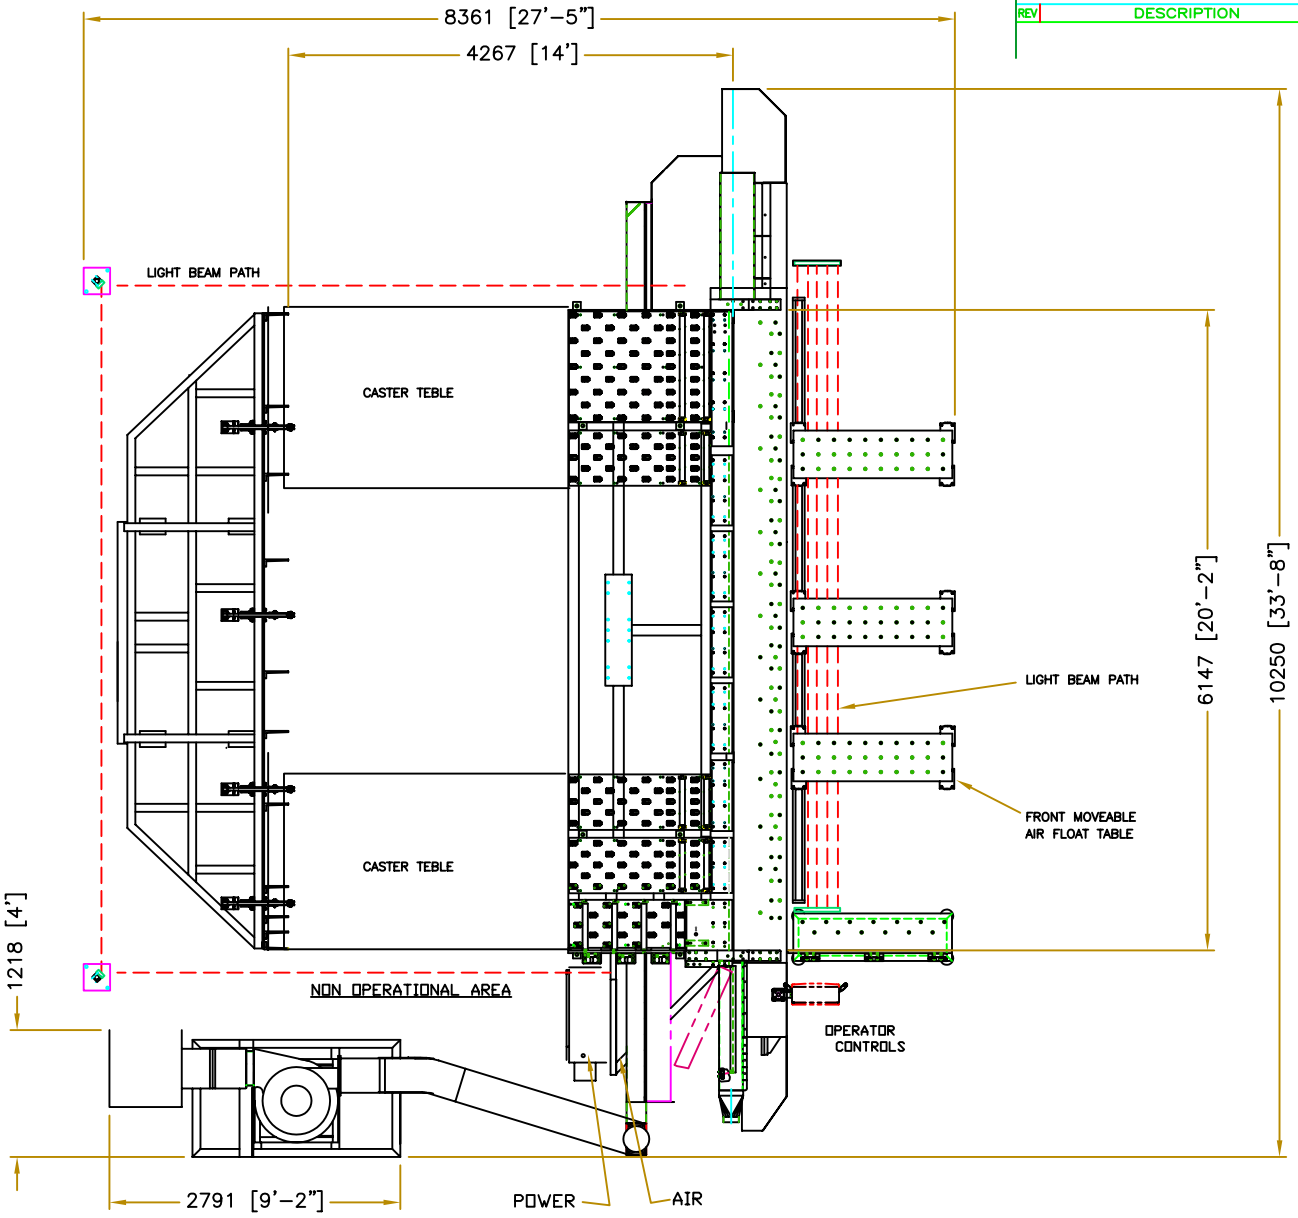

NOTES:

1. UTILITIES:
   AIR 50 CFM AT 100 PSI 3/4" NPT
   460/480 VAC +/-5 % 60 Hz 3 PH 80 AMPS
   5/8" DIA. COPPER CLAD GROUND ROD
   TO ACHIEVE STATIC GROUND RESISTANCE
   OF 1 Ohm MEASURED AT ROD
2. STANDARD FACTORY FLOORING REQUIRED

NEXT ASSY	USED ON
–	–

ITEM	QTY	DESCRIPTION / SPECIFICATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ARE: ANGLES ±30'
0. ±2.0
0.0 ±0.3 0.00 ±0.1

MATERIAL

FINISH: FINISH

CONTRACT NO.

APPROVALS	DATE
DWN B.J.H	–
CHKD	
ISSUED	

DO NOT SCALE DRAWING

METLSAW™

NF2014 PRECISION SAWING SYSTEM FOR 20 FT. STOCK

AREA	TYPE	DWG NO.	REV
MK	GA	MK659	–

SIZE: – SCALE: NTS 1 OF 1