

METLSAW

CC510-T8 DoALL Automatic Circle Cutter




- High Production Sawing Rates
- Precision Tolerances to $\pm .007$ in
- Drop Down Hydraulic Turntable
- Material Handling Options for Loading and Unloading
- Eliminates Scribing
- Fully Automatic Circle Cutting

CC510-T8 DoALL Specifications



Hydraulic Turntable and Clamping Ram

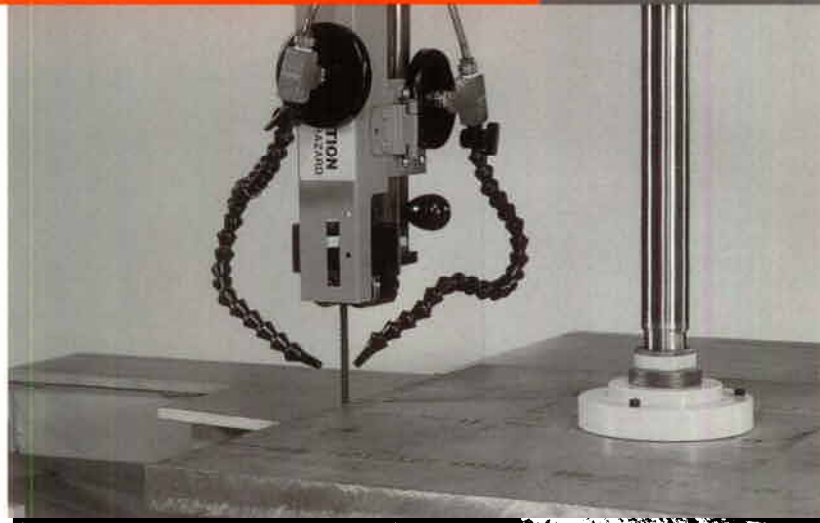

Material Positioned for Cutting



Operator Controls



Table Adjustment for Circle Diameters

CAPABILITY

Size of Circle	10 in. to 5 ft.
Thickness of Material	Up to 8 in.

CIRCLES AND RINGS

Smallest Outside Diameter	10 in.
Largest Outside Diameter	60 in.
Minimum Wall Thickness for Rings	1 in.
Maximum Wall Thickness for Rings	15 in.

BAND SAW SPEEDS

Cutting Speed	Adjustable
5 HP Single	Range 550 to 5500 FPM
3 HP Dual	Low Range 30 to 320 FPM High Range 550 to 5500 FPM

POWER REQUIREMENTS

Voltage	460/480
Air Requirements	30 CFM